

GXX

Aluminum Polymer Capacitors

+105°C, 5000 Hour, SMD Surface Mount




FEATURES

High temperature – Very Low ESR – High ripple current – stable with temperature – High frequency – Long life – ROHS compliant

APPLICATIONS

DC-DC converters – Voltage regulators – Decoupling

Operating Temperature Range		-55°C to +105°C						
Capacitance Tolerance		+20% at 120 Hz, 20°C						
Surge Voltage	WVDC	4	6.3	10	16	20	25	
	SVDC	1.15 x rated WVDC						
Dissipation Factor 120 Hz, 20°C		12% MAX						
Leakage Current		2 Minutes						
		See standard part listing						
Low Temperature Stability Impedance Ratio (100 kHz)	-55°C/ +20°C	≤1.25						
	+105°C/ +20°C	≤1.25						
Load Life		5000 hours at 105°C with rated WVDC applied						
		Capacitance Change	≤20% of initial measured value					
		Dissipation Factor	≤150% of maximum specified value					
		ESR	≤150% of maximum specified value					
		Leakage Current	≤100% of maximum specified value					
Damp Heat test		1000 hours at 60°C with no voltage applied at 90-95% R.H.						
		Capacitance Change	≤20% of initial measured value					
		Dissipation Factor	≤150% of maximum specified value					
		ESR	≤150% of maximum specified value					
		Leakage Current	≤100% of maximum specified value					
Resistance to Soldering Heat		Capacitors placed on a 230°C hot plate for 5 seconds with their electrode terminations facing downward will fulfill the following conditions after being cooled to room temperature						
		Capacitance Change	≤20% of initial measured value					
		Dissipation Factor	≤150% of maximum specified value					
		ESR	≤150% of maximum specified value					
		Leakage Current	≤100% of maximum specified value					
Ripple Current Multipliers		Frequency (Hz)						
		120Hz≤f<1kHz	1kHz≤f<10kHz	10kHz≤f<100kHz	100kHz≤f<500kHz			
		0.05	0.3	0.7	1.0			

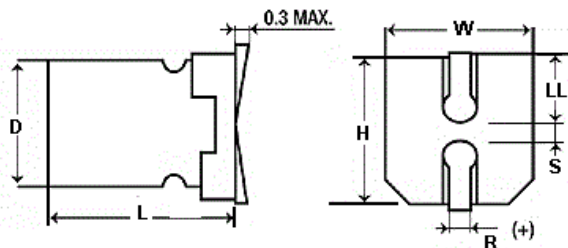

D+0.5	W±0.2	H±0.2	LL+0.2	R±0.15	S±0.2
6.3	6.6	6.6	2.1	.65	1.9
8	8.3	8.3	2.8	.95	3.2

ILLINOIS CAPACITOR

Your Global Source for World-Class Capacitors

© 2013 Illinois Capacitor, Inc.

North America
Tel: 847.675.1760
sales@illcap.com

Asia
Tel: 852.2793 0931
sales@illcap.com.hk

GXX

+105°C Low ESR, High Ripple Current

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum D.F. 120 Hz, 20°C	Maximum ESR (Ω) 120 Hz, +20°C	Maximum ESR (mΩ) 100 kHz, +20°C	Leakage Current (µA)	Maximum RMS Ripple Current (mA) 100 kHz, +105°C	Dims DxL (mm)
10	25	106GXX025MFT	0.1	16.5786	60	125	1500	8x6.7
22	20	226GXX050MEY	0.1	7.5358	60	88	1450	6.3x5.7
39	6.3	397GXX6R3MFT	0.12	0.5101	22	491.4	3220	8x6.7
39	16	396GXX016MEY	0.12	5.1011	37	124.8	2050	6.3x5.7
56	4	567GXX004MFT	0.12	0.3553	22	448	3220	8x6.7
68	10	686GXX010MEY	0.12	2.9256	30	136	2200	6.3x5.7
68	16	686GXX016MEY	0.12	2.9256	30	217.6	2200	6.3x5.7
76	20	476GXX020MFT	0.12	4.2328	45	188	1890	8x6.7
86	16	826GXX016MFT	0.12	2.4261	30	262.4	2760	8x6.7
120	6.3	127GXX6R3MEY	0.12	1.6579	22	151.2	2570	6.3x5.7
120	10	127GXX010MEY	0.12	1.6579	27	240	2320	6.3x5.7
120	16	127GXX016MFT	0.12	1.6579	27	384	2900	8x6.7
150	4	157GXX004MEY	0.12	1.3263	22	120	2570	6.3x5.7
150	10	157GXX010MFT	0.12	1.3263	30	300	2760	8x6.7
220	6.3	227GXX6R3MFT	0.12	0.9043	22	277.2	3200	8x6.7
220	6.3	227GXX6R3MEY	0.12	0.9043	22	277.2	2570	6.3x5.7
270	4	277GXX004MFT	0.12	0.4368	22	216	3220	8x6.7